





Model EE (WP-LP, WP-DF & WP-6) BOP

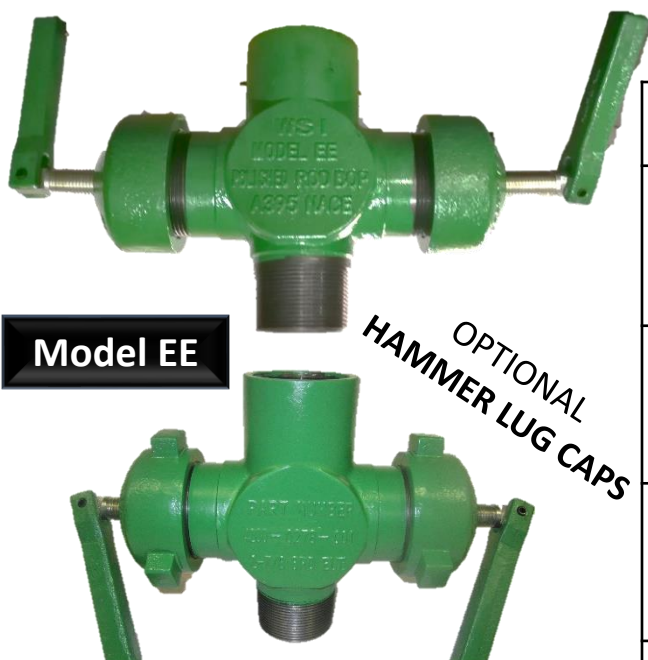


Model EE Ram Configuration




WP-LP
1500 PSI

- 3/4
- 1-1/8
- 1-1/4
- 1-1/2



WP-DF
1500 PSI

- 0 – 1-1/2



WP-6
3000 PSI

- 0 - 3/8
- 1-1/4
- 1-1/2

NOTE: Sour Service Elastomers Available

1500/3000 PSI

BOP Key Features

WP-LP (WP-DF) – 1500 PSI

- A395 Ductile – NACE
- Easily upgraded to WP-6 for higher working pressure
- Easy operation with quick turn handles
- End caps available in hammer lug configuration

WP-6 – **3000 PSI**

- A395 Ductile - NACE
- Easy to maintain in the field
- Easy operation with quick turn handles
- End caps available in hammer lug configuration